
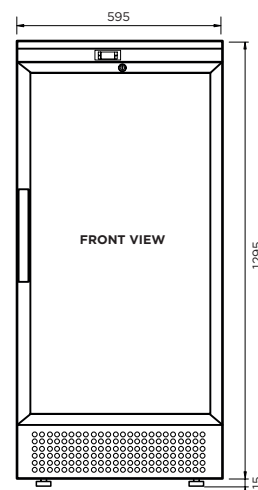
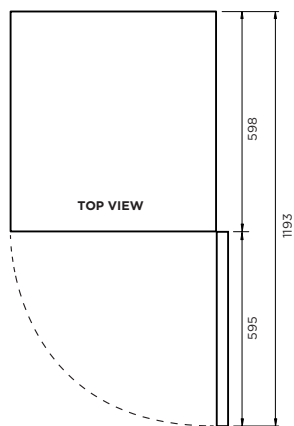


MED0220GD | Bromic MediFridge™ Display Chiller 220L

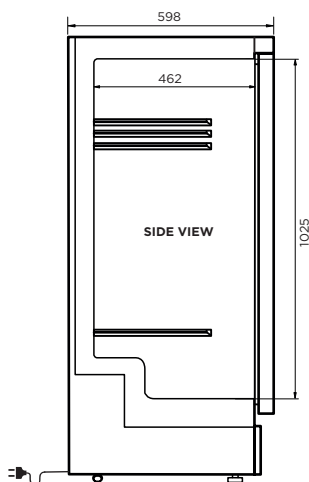

FEATURES

Integrated temperature Alarm System ensures sensitive stock is maintained and managed according to requirements

Fan Forced air circulation ensures even temperature throughout the unit

Increased air circulation around the unit thanks to unique custom wire 'open rung' shelves at the top and bottom to prevent overstocking

Consistent air circulation throughout the unit ensures mandated temperatures of 2°C to 8°C

Backed by Bromic national services & warranty

DIMENSIONS

| | External (mm) | Internal (mm) |
|--------|---------------|---------------|
| Height | 1310 | 1025 |
| Width | 595 | 505 |
| Depth | 598 | 462 |

MED0220GD | Bromic MediFridge™ Display Chiller 220L

SPECIFICATIONS

| Part Number | 3736217 | External (mm) | Internal (mm) |
|--------------------|------------------------------------|---------------------------|--------------------------------|
| Capacity | 215L | Height | 1310 |
| Weight | 65kg | Width | 595 |
| Air Circulation | Fan-Forced | Depth | 598 |
| Climate Class | 4 | | 462 |
| Temperature | Range | +2°C to 8°C | |
| | Min/Max Temp Recorder | Yes | |
| | Display | Digital | |
| Exterior | Material | Powder Coated Sheet Metal | |
| | Solid or Glass | Low-E Glass + Argon Gas | |
| | Shape | Flat | |
| Door | Self-Closing | Yes | |
| | Door Lock | Yes | |
| | Door Switch | Yes | |
| | Door Swing Dimension | 595mm | |
| | Total Depth of Door Open | 1193mm | |
| | Shelves | No. of Shelves | 4 (3 full size, 1 floor shelf) |
| Style of Shelves | | Open rung shelf | |
| Shelves Dimensions | | 500 x 400mm | |
| Adjustable | | Yes | |
| Capacity | | 20kg | |
| Electrical | Voltage | 240V | |
| | Frequency | 50Hz | |
| | Input Power | 235W | |
| | Current | 2A | |
| | Power Consumption | 1.53kWh/24hr | |
| Compressor | Refrigerant | R134a | |
| | Charge | 165g | |
| Alarms | Temperature | Yes | |
| | Audible | Yes | |
| Internal Lighting | LED Internal Light | Yes | |
| Defrost | Manual/Automatic | Automatic | |
| | Type of Defrost System | OFF Cycle | |
| Plug | Type | 3-pin AU plug | |
| | Rated Current | 10A | |
| | Plug Location | Rear, bottom left | |
| Insulation Type | Cyclopentane | | |
| Feet/Wheels | 2 rollers at rear, 2 feet at front | | |
| Approvals | MEPS, Complies to QCPP Standards | | |
| Warranty | 2 year warranty | | |
| Data Logger | Available, part #350700050 | | |

BROMIC Pty Ltd reserve the right to alter specifications without notice.